

Electrical Motor ULV Cold Fogger

# Model: 2680A




## **Easy to Regulation**

A precision regulating valve in the nozzle head controls liquid output and droplet size, producing heavily, invincible, uniform droplets, better penetration and diffusibility.



## **Easy to Work**

Unique shoulder strap design, saving labour.

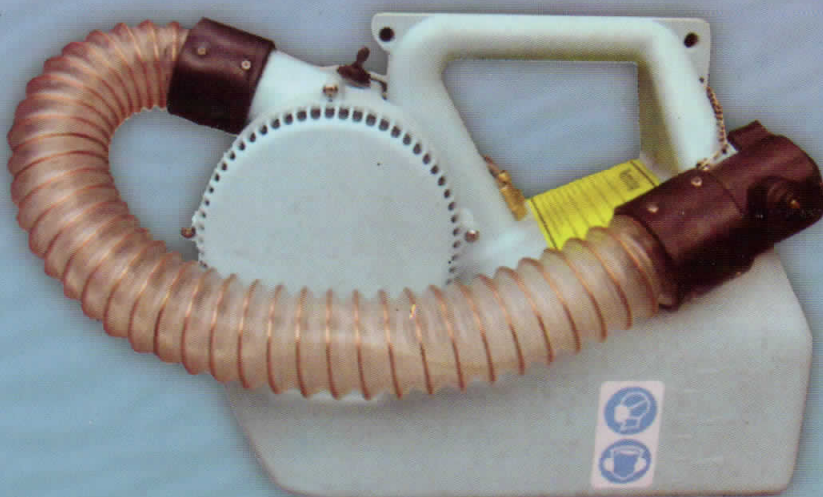

Considerately and well designed power line reel, more comfortable working.

## **VERY LONG WORKING LIFE-SPAN ELECTRIC MOTOR**

### **Fields of Application**

Capable of dispensing water or oil-based chemicals formulations. Such as pesticides, deodorant, fungicides, disinfectant, miticide, poultry vaccines, odor neutralizers, etc. It had been widely used in indoor/outdoor applications such as hospitals, school, homes, hotels, resorts, green-house, food processing plants, warehouses, dairy and poultry farms, animal care facilities and diseases control programs, horse stables, etc.

**Exclusively Imported & Distributed by:**



# Model: 2680A



## Features

- The high pressure of the pump makes it possible to use spraying nozzles that have relatively that even wettable powder spraying mixtures can be applied without any problems.
- All the parts get in contact with chemicals are made from anti-corrosive material.
- Equip with an adjustable output of 0-36 per hour, could adjust the flow rate to applying for ultra-low-volume or low-volume spraying, this versatile unit gives you the power to handle both large and small area, whenever the ULV aerosol generator is needed.



- Equip with a flexible hose with handle on nozzle permits spraying into normally inaccessible and hard to reach areas such as under/between kitchen cabinets, under carpets and above ceilings.



- Large-caliber solution tank cover, easy to add chemical solution.



- 6L solution tank
- Large Volume solution tank, could load more chemical solution.



## Technical Specification

Electrical Motor	800W 220VAC /50Hz
Fogging Nozzle	Four counter-rotating vortex nozzles
Particle Size	5-50 micron VMD, adjustable
Liquid Flow Rate In l/h	0-36, adjustable
Tank Capacity in l	6
Dimension in mm (LXWXH)	450X220X300
Weight in kg. empty	4.2
Dimension in mm (LXWXH), (shipping data)	4452X30X360
Weight in Kg, empty (shipping data)	5.2